



401 E Trinity Ln, Suite 120  
Nashville, TN 37207  
(615) 904-5640  
kenny@kg3.io

## RIGGING RING DETAIL

Spec #: KG3-BEA-RING-01

Job: Beabadoobee 2026 Headline Tour


Date: August 31, 2026

Every rigging point on the LED rope gets a pair of KG3 rigging rings. One ring is a two piece steel clamp collar that closes around the 22 mm rope with two shouldered M6 lifting eyebolts threaded into the collar, one on each face. The upper eye takes the lift, the opposite eye takes the safety. Both eyes are closed forged steel with no gate, so a maillon or shackle passes straight through and can pull left or right.

**Eye opening: 5/8 in (15.9 mm) inside diameter. Eye stock: 3/16 in (4.8 mm).** Size maillons and shackles to this hole. Pins and gates up to roughly 13 mm pass through, and the link closes around the 3/16 in stock with ease. Common 6 to 10 mm maillons fit with room.

### RIGGING RING, END AND SIDE VIEWS

*Not to scale. Dimensions as noted.*

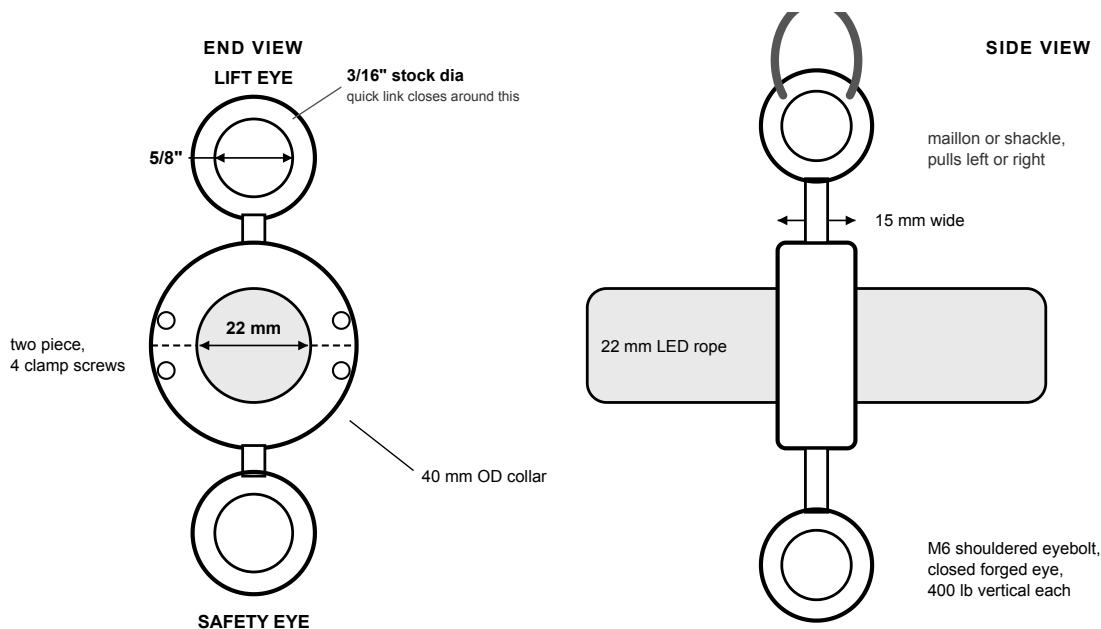

One ring shown. Rings are installed in pairs at every rigging point, side by side on the rope.

| ITEM                                             | SPECIFICATION                                                                      |
|--------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Eye opening (hole for maillon or shackle)</b> | <b>5/8 in (15.9 mm) inside diameter</b>                                            |
| Eye stock diameter                               | 3/16 in (4.8 mm), the section a quick link or shackle closes around                |
| Eyebolt                                          | Steel shouldered lifting eyebolt, M6 x 1, closed forged eye, zinc plated           |
| Rated capacity                                   | 400 lb (181 kg) vertical, per eye                                                  |
| Eyes per ring                                    | 2, on opposite faces of the collar: one lift, one safety                           |
| Collar                                           | Two piece steel clamp collar, 40 mm OD x 15 mm wide, four socket head clamp screws |
| Fits                                             | 22 mm 360 degree LED rope (KG3 LumiRope 360 22 mm)                                 |
| Rings per rigging point                          | 2                                                                                  |

### NOTES FOR RIGGING

- The eye is closed and forged, no gate, so hardware must pass through the 5/8 in opening and close around the 3/16 in stock. Maillons work great and can pull left or right.
- Each rigging point carries two rings: connect the lift to one ring's lift eye and the safety to the second ring.
- Per point rope loads are on the live rigging page: <https://bea.kg3.io/rigging>